


Power Supplies

EN PSU Range

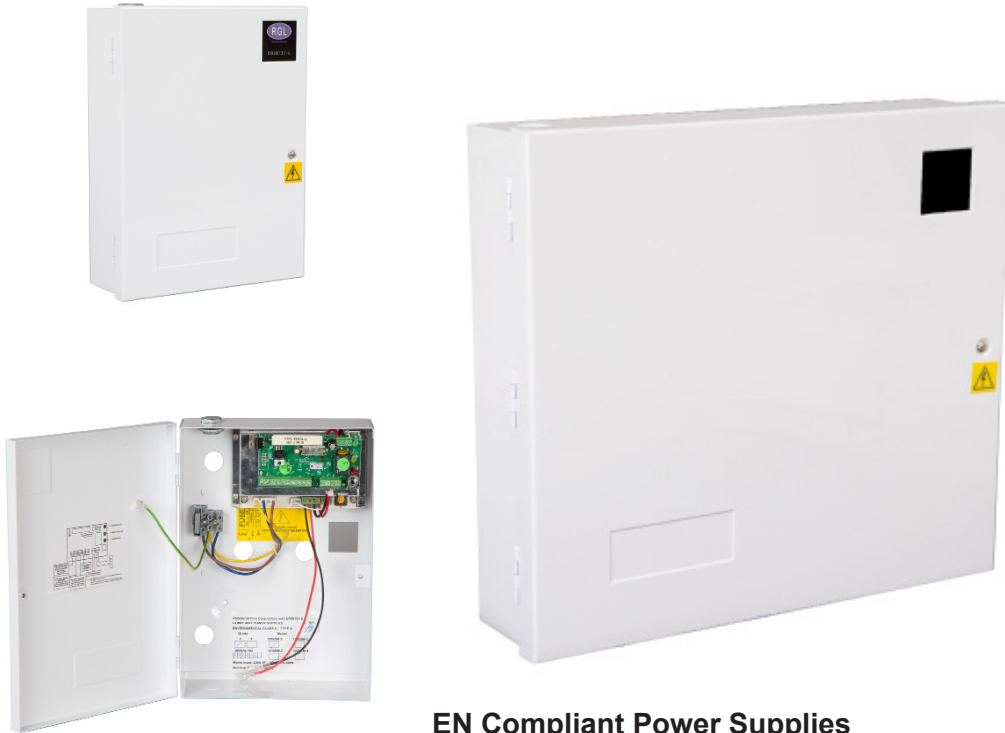

**EN Compliant Power Supplies
EN50131-6:2008**

Technical specifications

- Internal LED Diagnostics
- Full current to load plus additional battery charging
- 13.8VDC regulated output
- Deep discharge protection
- Security front tamper (grade 2) or front and rear tamper (grade 3)
- Fault outputs:
 - EPS fault (mains fail)
 - APS fault (battery fail)
 - PO fault (output fail)
- Can recharge a 9Ah battery (min 10v) from flat to 80% in 24hours (1209)
- Can recharge a 18Ah battery (min 10v) from flat to 80% in 24hours (1218)
- Monitors battery health

EN2-1209SM-5	265x197x72 (mm)	Advanced monitoring PSU (9Ah) Grade 2	1.49kg (Boxed) / 1.33kg (Unboxed)
EN2-1209SM-2	340x310x80 (mm)	Advanced monitoring PSU (9Ah) Grade 2	3.07kg (Boxed) / 2.84kg (Unboxed)
EN2-1218SM-2	340x310x80 (mm)	Advanced monitoring PSU (18Ah) Grade 2	3.07kg (Boxed) / 2.84kg (Unboxed)
EN3-1209SM-5	265x197x72 (mm)	Advanced monitoring PSU (9Ah) Grade 3	1.49kg (Boxed) / 1.33kg (Unboxed)
EN3-1209SM-2	340x310x80 (mm)	Advanced monitoring PSU (9Ah) Grade 3	3.07kg (Boxed) / 2.84kg (Unboxed)
EN3-1218SM-2	340x310x80 (mm)	Advanced monitoring PSU (18Ah) Grade 3	3.07kg (Boxed) / 2.84kg (Unboxed)

Other items in the RGL range.



p: +44 (0) 1902 656667 | www.rgl.co

Intruder



FEATURES

- Mild steel constructions.
- White powder coated finish.
- Hinged style box
- Wiring instructions inside product
- More efficient and enviromentally friendly.
- Multiple cable entry points.
- Front tamper (EN2 & EN3)
- Rear tamper (EN3 only)
- Switchmode technology

