




FIRE FUSED OUTPUT MODULE - (FOUR FUSED OUTPUTS)

ACCESSORIES

RGL has a broad range of accessories that complement our access control range.

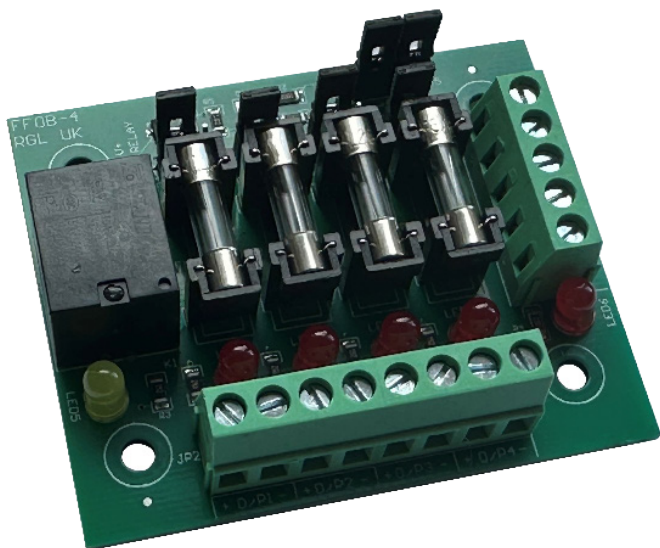

FFOB-4

SPECIFICATION	FEATURES	OTHER PRODUCTS
FFOB-4 • 4 Fused Outputs (4 x F3A Fuses) • Fire switching relay • 12VDC • Current 30mA • Contact rating 10A @ 12VDC • 1 x COM - NONC • LED Indication	FFOB-4 • Selectable outputs - switched or permanently on • Use volt free pairs from fire alarm • LED Indication J1 - J4 Jumper Settings  Output switched using trigger setting  Output voltage unswitched J5 Jumper Settings  NC - Closed contact O/P voltage off  NO - Closed contact O/P voltage off  +VE—Applying voltage from external supply (O/P voltage ON)	4ACCESS-12  WP-KS-1  SPX-26M  MBK-ML1200-M 
DIMENSIONS	CONTENTS	
FFOB-4 • 72x60 (mm) • 36g (Unboxed)	FFOB-4 • 3M sticky pad • Instructions	



Manufactured by a BSIA Member