





EXTERNAL MAGNETIC LOCKS

MAGNETIC LOCK

IP66 external range of maglocks and brackets from a market leader in access control.

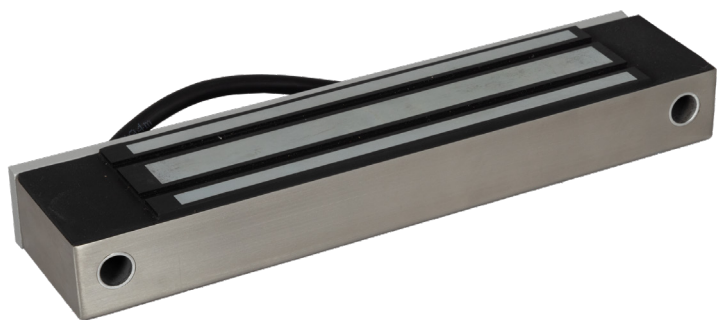

IP600ML-M

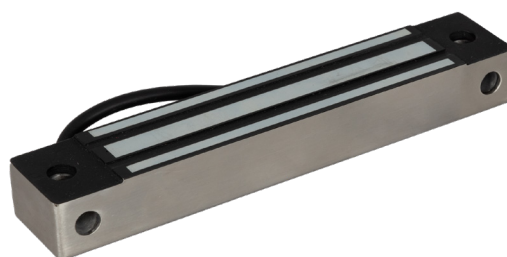

IP300ML-M

SPECIFICATION

- IP300ML-M & IP600ML-M
- Stainless steel housing
 - Monitored
 - Dual voltage 12/24 VDC @ 500/250mA
 - Comes complete with 1 metre cable
 - Built in surge protection
 - Surface mount
 - Fail safe operation (power to lock)
 - +/- 15% voltage tolerance
 - -10° to +50° operating temperature
 - Push off release pin on armature
 - Voltage free relay contacts

- IP300ML-M
- 140kg (300lb) holding force
- IP600ML-M
- 280kg (600lb) holding force

DIMENSIONS

- IP300ML-M
- 170x32x21 (mm) Maglock
 - 0.6kg Unboxed

- IP600ML-M
- 225x47x27 (mm) Maglock
 - 1.4kg Unboxed



FEATURES

- IP300ML-M & IP600ML-M
- External magnet IP66
 - Weatherproof
 - Dual voltage 12V/24V
 - Side or face fixing (IP300ML-M)
 - Side fixing (IP600ML-M)
 - Armature comes with fixing kit

- IP300ML-M
- 140kg (300lb) holding force
- IP600ML-M
- 280kg (600lb) holding force

- Suitable Brackets/Housings:
- BKIP300ZL (ZL bracket) for IP300ML-M
 - BKIP600ZL (ZL bracket) for IP600ML-M

CONTENTS

- IP300ML-M & IP600ML-M
- External magnet
 - Armature plate
 - Fixing kit
 - Instructions
 - Armature fixing template

OTHER PRODUCTS

WP66-G-CB-PTO



KPX75



4ACCESS-12



TRAN01-REC01



Manufactured by a BSIA Member